


# DIN 608

ISO - EN -

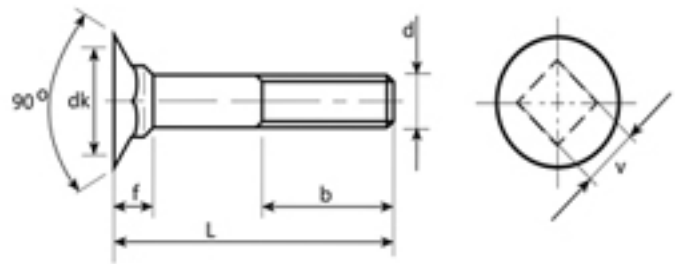

d	M10	M12
P	1,5	1,75
b	26	30
dk (max)	19,65	24,65
f (max)	8,45	11,05
v (max)	10,58	12,7