


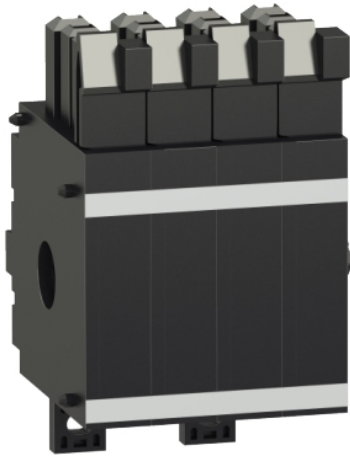

Osnovne informacije

Tip proizvoda ili komponente	Pomoćni kontakt
Kratko ime uređaja	4 OF
Kompatibilnost grupe proizvoda	Masterpact (Masterpact NW)
Sastav signalnih kontakata	4 NO/NC

Dopunske informacije

Tip pomoćnog kontakta	Standardni Za niže vrednosti napona
Način montiranja	Izvlačivo
Breaking capacity (A)	AC-12: 10 A at 240/380 V AC 50/60 Hz conforming to EN/IEC 60947-2 AC-12: 10 A at 480 V AC 50/60 Hz conforming to EN/IEC 60947-2 AC-12: 6 A at 690 V AC 50/60 Hz conforming to EN/IEC 60947-2 DC-12: 10 A at 24/48 V DC conforming to EN/IEC 60947-2 DC-12: 10 A at 125 V DC conforming to EN/IEC 60947-2 DC-12: 3 A at 250 V DC conforming to EN/IEC 60947-2 8 A at 480 V AC 50/60 Hz conforming to UL 489 6 A at 600 V AC 50/60 Hz conforming to UL 489 6 A at 250 V DC conforming to UL 489
Minimalno opterećenje	100 mA pri 24 V 2 mA pri 15 V

Pakovanje

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4,0 cm
Package 1 Width	13,0 cm
Package 1 Length	16,0 cm
Package 1 Weight	187,0 g

Održivost ponude

Propis REACH	REACH Deklaracija
EU RoHS direktiva	Usaglašeno EU RoHS Deklaracija
Bez žive	Da
Informacije o RoHS izuzecima	Da
RoHS regulativa za Kinu	RoHS Deklaracija Za Kinu

Ugovorna garancija

Garancija	18 meseci
-----------	-----------