



Osnovne informacije

Grupa proizvoda	Harmony XVM
Tip proizvoda ili komponente	Poklopac osnovne jedinice
Sastav seta	Poklopac Baza
Ime komponente	XVM
Tip baze svetleće kolone	Baza bez zujalice

Dopunske informacije

Prečnik za montiranje	45 mm
Boja kućišta	Bela
Povezivanje - priključci	Vijčani priključci, 1 x 0.325...1 x 1.5 mm ²
Označavanje	CE
Masa proizvoda	0,055 kg

Okruženje

Standardi	EN/IEC 60947-5-1 EN/IEC 60947-1
Sertifikacija proizvoda	CCC
Temperatura okoline za skladištenje	-25...70 °C
Temperatura okoline za rad uređaja	-10...50 °C
Klasa zaštite protiv električnog udara	Klasa I montaža aluminijumske cevi u skladu sa IEC 60947-1 Klasa I montaža aluminijumske cevi u skladu sa IEC 60947-5-1 Klasa I montaža aluminijumske cevi u skladu sa IEC 61140
Ip stepen zaštite	IP40 bilo koja pozicija izuzev vertikalne u skladu sa IEC 60529 IP42 vertikalnoj poziciji u skladu sa IEC 60529
Tretman zaštite	TC

Pakovanje

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6,0 cm
Package 1 Width	4,8 cm
Package 1 Length	4,8 cm
Package 1 Weight	60,0 g
Unit Type of Package 2	S01
Number of Units in Package 2	21
Package 2 Height	15,0 cm
Package 2 Width	15,0 cm
Package 2 Length	40,0 cm
Package 2 Weight	1,623 kg

Održivost ponude

Status održive ponude	Green Premium proizvod
Propis REACh	📄 REACh Deklaracija
EU RoHS direktiva	Proaktivna usaglašenost (proizvod nije u zakonskom okviru direktive EU RoHS) 📄 EU RoHS deklaracija
Bez žive	Da
Informacije o RoHS izuzecima	📄 Da
RoHS regulativa za Kinu	📄 RoHS Deklaracija Za Kinu
Izjava o zaštiti okoliša	📄 Profil Ekološke Prihvatljivosti Proizvoda


Ugovorna garancija

Garancija	18 meseci
-----------	-----------

Customer Assembled Tower Light

Dimensions

Below drawing shows a tower light with 3 illuminated stages. Select the number of stages according to the product characteristics in order to get b dimension.

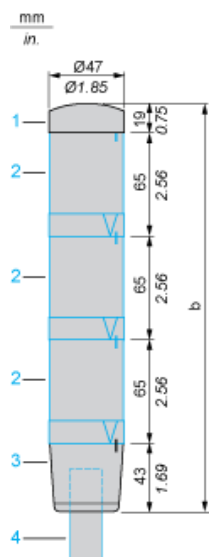


- (1) Cover (included with base unit)
- (2) Illuminated unit, to be ordered separately
- (3) Base unit
- (4) Fixing base XVMZ0•/Z0•T, to be ordered separately

Number of illuminated units (ref. 2)	b in mm	b in in.
1	127	5.00
2	192	7.56
3	257	10.12
4	322	12.68
5	387	15.24

Customer Assembled Tower Light

Wiring Diagram

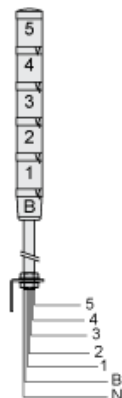

Indicator bank with buzzer (4 illuminated units max.):

- 4: 4th illuminated unit
- 3: 3rd illuminated unit
- 2: 2nd illuminated unit
- 1: 1st illuminated unit
- N: Common
- B: Buzzer

Indicator bank without buzzer:

- 5: 5th illuminated unit
- 4: 4th illuminated unit
- 3: 3rd illuminated unit
- 2: 2nd illuminated unit
- 1: 1st illuminated unit
- N: Common

Maximum capacity for wiring through support tube:

- 6 wires x 1 mm²/16 AWG,
- 5 wires x 1.5 mm²/14 AWG