



Osnovne informacije

Grupa proizvoda	Harmony XVM
Tip proizvoda ili komponente	Poklopac osnovne jedinice
Sastav seta	Baza Poklopac
Ime komponente	XVM
Tip baze svetleće kolone	Baza sa integrisanom zujalicom
[us] nazivni napon	24 V

Dopunske informacije

Prečnik za montiranje	45 mm
Tip signalizacije	Stalna ili isprekidana zujalica
Tip kola napajanja	AC/DC
Boja kućišta	Bela
Povezivanje - priključci	Vijčani priključci, 1 x 0.325...1 x 1.5 mm ²
Označavanje	CE
Struja potrošnje	< 15 mA
Frekvencija osnovnog harmonika	4 kHz
Masa proizvoda	0,065 kg

Okruženje

Nivo buke	0...80 dB pri 1 m
Standardi	EN/IEC 60947-5-1 EN/IEC 60947-1
Sertifikacija proizvoda	CCC
Temperatura okoline za skladištenje	-25...70 °C
Temperatura okoline za rad uređaja	-10...50 °C
Klasa zaštite protiv električnog udara	Klasa I montaža aluminijumske cevi u skladu sa IEC 60947-1 Klasa I montaža aluminijumske cevi u skladu sa IEC 60947-5-1 Klasa I montaža aluminijumske cevi u skladu sa IEC 61140
Ip stepen zaštite	IP40 bilo koja pozicija izuzev vertikalne u skladu sa IEC 60529 IP42 vertikalnoj poziciji u skladu sa IEC 60529
Tretman zaštite	TC

Pakovanje

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5,2 cm
Package 1 Width	9,5 cm
Package 1 Length	9,9 cm
Package 1 Weight	72,0 g
Unit Type of Package 2	S01
Number of Units in Package 2	21
Package 2 Height	15,0 cm

Package 2 Width	15,0 cm
Package 2 Length	40,0 cm
Package 2 Weight	1,782 kg

Održivost ponude

Status održive ponude	Green Premium proizvod
Propis REACH	 REACH Deklaracija
EU RoHS direktiva	Proaktivna usaglašenost (proizvod nije u zakonskom okviru direktive EU RoHS)  EU RoHS deklaracija
Bez žive	Da
Informacije o RoHS izuzecima	 Da
RoHS regulativa za Kinu	 RoHS Deklaracija Za Kinu
Izjava o zaštiti okoliša	 Profil Ekološke Prihvatljivosti Proizvoda
WEEE	Ovaj proizvod je na tržištima Evropske unije neophodno odložiti u skladu sa specifičnim smernicama za prikupljanje otpada i nikako ne sme da dospe u kontejnere za otpatke.


Ugovorna garancija

Garancija	18 meseci
-----------	-----------

Customer Assembled Tower Light

Dimensions

Below drawing shows a tower light with 3 illuminated stages. Select the number of stages according to the product characteristics in order to get b dimension.

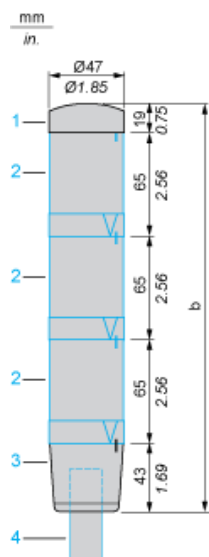


- (1) Cover (included with base unit)
- (2) Illuminated unit, to be ordered separately
- (3) Base unit
- (4) Fixing base XVMZ0•/Z0•T, to be ordered separately

Number of illuminated units (ref. 2)	b in mm	b in in.
1	127	5.00
2	192	7.56
3	257	10.12
4	322	12.68
5	387	15.24

Customer Assembled Tower Light

Wiring Diagram

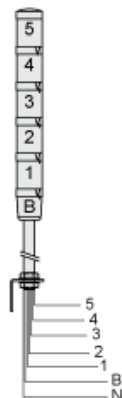

Indicator bank with buzzer (4 illuminated units max.):

- 4: 4th illuminated unit
- 3: 3rd illuminated unit
- 2: 2nd illuminated unit
- 1: 1st illuminated unit
- N: Common
- B: Buzzer

Indicator bank without buzzer:

- 5: 5th illuminated unit
- 4: 4th illuminated unit
- 3: 3rd illuminated unit
- 2: 2nd illuminated unit
- 1: 1st illuminated unit
- N: Common


Maximum capacity for wiring through support tube:

- 6 wires x 1 mm²/16 AWG,
- 5 wires x 1.5 mm²/14 AWG

Base Unit with Integral Buzzer

Adjustment of Audible Signal

View from above:



- (1) Volume adjustment potentiometer: 0 to 85 dB. Use either a cross headed or flat tipped screwdriver.
- (2) 2-position selector for type of audible signal: continuous tone or intermittent tone