



Osnovne informacije

Grupa proizvoda	Harmony XVM
Tip proizvoda ili komponente	Set osnovne jedinice
Sastav seta	250 mm cevasti nosač Baza Poklopac Držač
Ime komponente	XVM
Tip baze svetleće kolone	Baza sa integrisanom zujalicom
[us] nazivni napon	230...240 V

Dopunske informacije

Prečnik za montiranje	45 mm
Tip signalizacije	Stalna ili isprekidana zujalica
Tip kola napajanja	AC
Boja kućišta	Bela
Povezivanje - priključci	Vijčani priključci, 1 x 0.325...1 x 1.5 mm ²
Označavanje	CE
Struja potrošnje	< 18 mA
Frekvencija osnovnog harmonika	4 kHz
Masa proizvoda	0,308 kg

Okruženje

Nivo buke	0...80 dB pri 1 m
Standardi	EN/IEC 60947-1 EN/IEC 60947-5-1
Sertifikacija proizvoda	CCC
Temperatura okoline za skladištenje	-25...70 °C
Temperatura okoline za rad uređaja	-10...50 °C
Klasa zaštite protiv električnog udara	Klasa I montaža aluminijumske cevi u skladu sa IEC 60947-1 Klasa I montaža aluminijumske cevi u skladu sa IEC 60947-5-1 Klasa I montaža aluminijumske cevi u skladu sa IEC 61140
Ip stepen zaštite	IP40 bilo koja pozicija izuzev vertikalne u skladu sa IEC 60529 IP42 vertikalnoj poziciji u skladu sa IEC 60529
Tretman zaštite	TC

Pakovanje

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4,0 cm
Package 1 Width	10,0 cm
Package 1 Length	32,0 cm
Package 1 Weight	316,0 g
Unit Type of Package 2	S02
Number of Units in Package 2	15
Package 2 Height	15,0 cm

Package 2 Width	30,0 cm
Package 2 Length	40,0 cm
Package 2 Weight	5,21 kg

Održivost ponude


Status održive ponude	Green Premium proizvod
Propis REACH	 REACH Deklaracija
EU RoHS direktiva	Proaktivna usaglašenost (proizvod nije u zakonskom okviru direktive EU RoHS)  EU RoHS deklaracija
Bez žive	Da
Informacije o RoHS izuzecima	 Da
RoHS regulativa za Kinu	 RoHS Deklaracija Za Kinu
Izjava o zaštiti okoliša	 Profil Ekološke Prihvatljivosti Proizvoda
WEEE	Ovaj proizvod je na tržištima Evropske unije neophodno odložiti u skladu sa specifičnim smernicama za prikupljanje otpada i nikako ne sme da dospe u kontejnere za otpatke.

Ugovorna garancija

Garancija	18 meseci
-----------	-----------

Customer Assembled Tower Light

Wiring Diagram

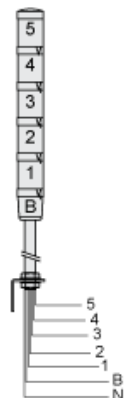

Indicator bank with buzzer (4 illuminated units max.):

- 4: 4th illuminated unit
- 3: 3rd illuminated unit
- 2: 2nd illuminated unit
- 1: 1st illuminated unit
- N: Common
- B: Buzzer

Indicator bank without buzzer:

- 5: 5th illuminated unit
- 4: 4th illuminated unit
- 3: 3rd illuminated unit
- 2: 2nd illuminated unit
- 1: 1st illuminated unit
- N: Common


Maximum capacity for wiring through support tube:

- 6 wires x 1 mm²/16 AWG,
- 5 wires x 1.5 mm²/14 AWG

Base Unit with Integral Buzzer

Adjustment of Audible Signal

View from above:



- (1) Volume adjustment potentiometer: 0 to 85 dB. Use either a cross headed or flat tipped screwdriver.
- (2) 2-position selector for type of audible signal: continuous tone or intermittent tone