



### Osnovne informacije

Grupa proizvoda	Altivar
Tip proizvoda ili komponente	EMC ulazni filter
Kompatibilnost grupe proizvoda	Altivar 312 Lexium 05 Altivar 312 Solar Altivar 31C Altivar Machine ATV320
Kompatibilnost proizvoda	ATV312HU22M2 ATV31CU22M2 LXM05AD28F1 LXM05AD28M2 LXM05BD28F1 LXM05BD28M2 LXM05CD28M2 Frekventni regulator ATV320...C motor: 2,2 kW, 200...240 V monofazno Frekventni regulator ATV320...W/ATV320...WS motor: 2,2 kW, 200...240 V monofazno
Specifične primene proizvoda	Ulazni filter za radio smetnje
[in] nazivna struja	22 A
Termički gubici	7,5 W za ATV31CU22M2
Broj faza mreže	Monofazno

### Dopunske informacije

Maksimalno curenje struje	80 mA 50 Hz
Napon napajanja	200...240 V
Tolerancija	10 %
Masa proizvoda	1,13 kg

### Okruženje

Ip stepen zaštite	IP20 IP41 (gornji deo)
Relativna vlažnost	0...93 % u skladu sa IEC 68-2-3
Temperatura okoline za rad	-10...50 °C
Temperatura okoline za skladištenje	-25...70 °C
Nadmorska visina za rad uređaja	<= 1000 m bez smanjenja struje 1000...3000 m sa smanjenjem vrednosti struje 1 % na 100 m
Otpornost na vibracije	1 gn (f= 13...150 Hz) u skladu sa IEC 60068-2-6 1.5 mm između pikova (f= 3...13 Hz) u skladu sa IEC 60068-2-6
Otpornost na udare	15 gn za 11 milisekundi u skladu sa EN/IEC 60068-2-27
Standardi	EN 133200 EN/IEC 61800-3

### Pakovanje

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5,7 cm
Package 1 Width	23,7 cm
Package 1 Length	28,2 cm
Package 1 Weight	967,0 g
Unit Type of Package 2	S04

Number of Units in Package 2	11
Package 2 Height	30,0 cm
Package 2 Width	40,0 cm
Package 2 Length	60,0 cm
Package 2 Weight	11,818 kg
Unit Type of Package 3	P06
Number of Units in Package 3	44
Package 3 Height	77,0 cm
Package 3 Width	80,0 cm
Package 3 Length	60,0 cm
Package 3 Weight	56,056 kg

## Održivost ponude


Propis REACH	<a href="#">REACH Deklaracija</a>
REACH bez SVHC	Da
EU RoHS direktiva	Proaktivna usaglašenost (proizvod nije u zakonskom okviru direktive EU RoHS) <a href="#">EU RoHS deklaracija</a>
Bez toksičnih teških metala	Da
Bez žive	Da
Informacije o RoHS izuzecima	<a href="#">Da</a>
RoHS regulativa za Kinu	<a href="#">RoHS Deklaracija Za Kinu</a>

## Ugovorna garancija

Garancija	18 meseci
-----------	-----------

Additional EMC Input Filters

Dimensions



Dimensions in mm

a	b	c	G	H	Ø
140	235	35	120	215	4.5

Dimensions in in.


a	b	c	G	H	Ø
5.51	9.25	1.38	4.72	8.46	0.18

---


Additional EMC Input Filter

---


Mounting the Filter under the Drive



Mounting the Filter next to the Drive

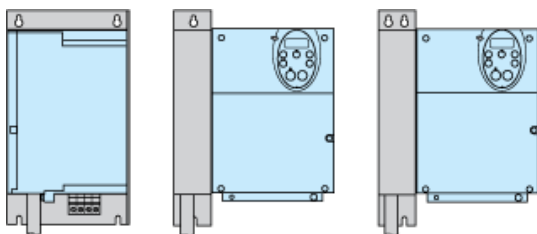

Recommended Schema

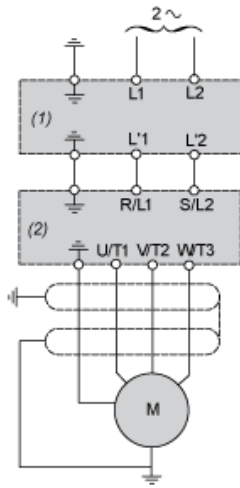

- (1) Filter
- (2) Drive